



MF 4" Down Light Specification

Model NO.:MF-400F137

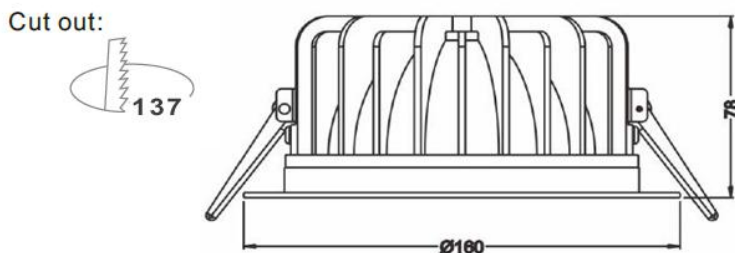

Fixed COB Series

UGR:19 KN<10% CRI>83

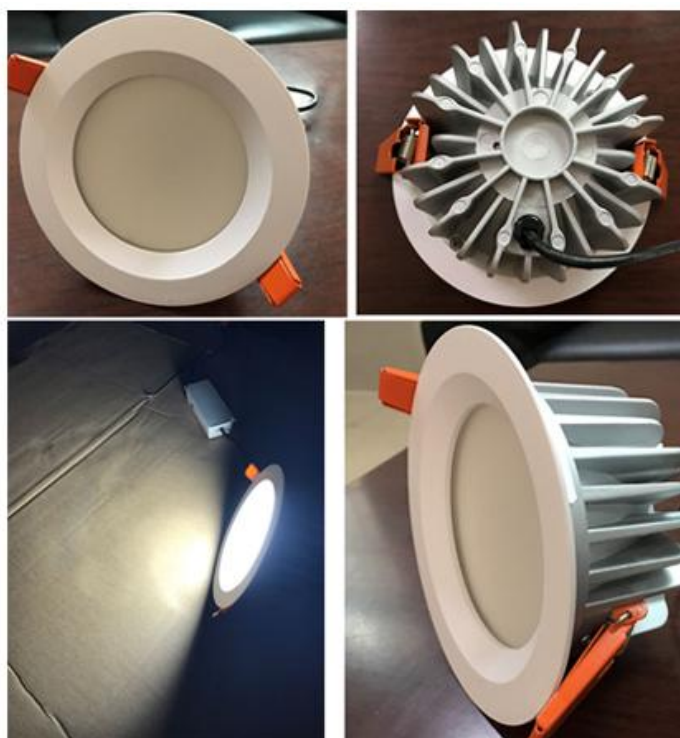

IEC62031
IEC60598-1
IEC60598-2
IEC61347
Comply with Energy Star SSL

ErP

CE

RoHS

F

SAMSUNG

EPISTAR

LIFUD




Product Parameters:

Input voltage	220-240Vac, 50hz/60hz
Product Size	D160*78mm
Cut out Size	∅ 137mm
Power(watt)	12W/ 15W
Color temperature	3000K / 4000K / 6000K
LED Chip	Samsung / Epistar
LED Driver	Lifud (IP44) / Meanwell (IP65)
PF	≥0.95
Housing Colour	White RAL9003
Luminous Flux (lm)	12W:1020lm@3000K, 1100lm@4000K, 1200lm@5000K 15W:1300lm@3000K, 1400lm@4000K, 1500lm@5000K
CRI (Ra)	>83
Lifespan	≥50000hrs
Beam Angle	80°
Material	Aluminum
Operating Temperature	-20°C ~50°C
Dimmable	Y
IP	IP44/IP65
Certificate	CE/ RoHS
Warranty Period	5 years

Package:




Packing Size: (CM)




18(D1)*19 (F1)* 10cm(H1)/PCS

N.W: 0.63KG, G.W:0.83 KG

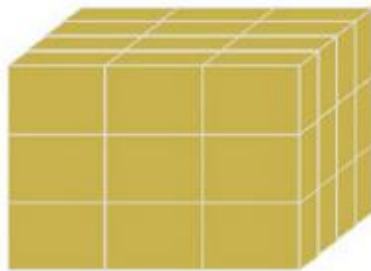

18PCS/CTN

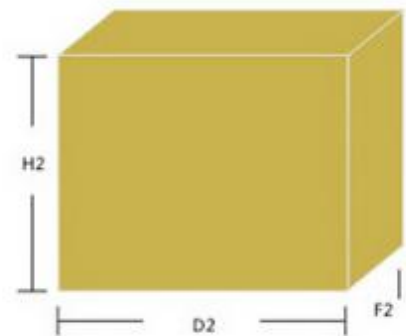

58.5(D2)*40.5(F2)*33.5cm(H2)/18PCS

N.W: 15.3KG, G.W: 16.3KG

Job reference photos from Ming Feng

